







Important: Read All Instructions Prior to Installation

Function introduction

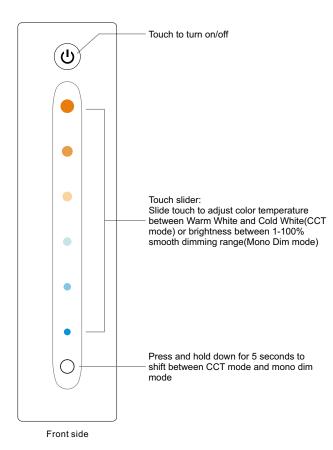

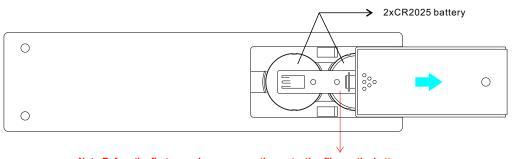

Note:Before the first use, please remove the protective film on the battery.

Product Data

Output	RF signal
Operation Frequency	868/869.5/916.5/434MHz
Power Supply	6V(2xCR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	141x35x8.5mm

- Control 1 zone of RF receiver
- · CCT color controller
- · Compatible with universal serie RF receiver
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

Pair with RF receiver

